

49/29/00  
JC957 U.S. PTO

11-01-00

A

PATENT  
Docket No. PD-990304

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
APPLICATION TRANSMITTAL LETTER

JC943 U.S. PTO  
09/702218  
10/30/00

Certification under 37 CFR 1.10 (if applicable)

EK685779047US

EXPRESS MAIL mailing number

October 30, 2000

Date of Deposit

I hereby certify that this application is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner for Patents, [and Trademarks] Washington, D.C. 20231.

Janet Bollinger

(Type or printed name of person mailing application)

*Janet Bollinger*  
(Signature of person mailing application)

Commissioner for Patents [and Trademarks]  
Washington DC 20231

Sir:

Transmitted herewith for filing is the patent application, including 9 sheet(s) of formal drawings, of inventor(s):

Arthur W. Wang

for: **SYSTEM AND METHOD FOR CONTINUOUS BROADCAST SERVICE FROM NON-GEOSTATIONARY ORBITS**

The filing fee for this application is calculated below:

For:

	CLAIMS AS FILED			
	NUMBER FILED	NUMBER EXTRA	RATE	
Basic Fee				\$710.00
Total Claims	32 -20 =	12 X	\$18.00	\$216.00
Independent Claims	4 - 3 =	1 X	\$80.00	\$80.00
Multiple Dependent Claims		X	\$260.00	\$0.00
<b>TOTAL FILING FEE :</b>				<b>\$1006.00</b>

Please charge Deposit Account No. 50-0383 of Hughes Electronics, Los Angeles, California, in the amount of **\$1006.00**. The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to that account.

The Commissioner is further hereby authorized to charge to said above Deposit Account No. 50-0383, pursuant to 37 CFR 1.25(b), any fees whatsoever which may properly become due or payable, as set forth in 37 CFR 1.16 to 1.17 inclusive, for the entire pendency of this application without specific additional authorization.

Please associate this application with the Hughes Electronics Corporation Customer Number 020991.

This form is submitted in triplicate.

HUGHES ELECTRONICS CORPORATION

HUGHES ELECTRONICS CORPORATION  
P.O. Box 956  
Bldg. 001, Mail Station A109  
El Segundo, CA 90245-0956  
Telephone: 310/662-9919  
Date: October 30, 2000

*Vijayalakshmi D. Duraiswamy*  
Vijayalakshmi D. Duraiswamy  
Reg. No. 31,505

PATENT  
PD-990302

SYSTEM AND METHOD FOR CONTINUOUS BROADCAST SERVICE FROM  
NON-GEOSTATIONARY ORBITS

Inventor:

Arthur W. Wang

# SYSTEM AND METHOD FOR CONTINUOUS BROADCAST SERVICE FROM NON-GEOSTATIONARY ORBITS

## BACKGROUND OF THE INVENTION

### 5 1. Field of the Invention

The present invention relates to systems and methods for providing satellite broadcast services, and in particular to a low cost system for increasing channel capacity in a satellite broadcast network.

### 10 2. Description of the Related Art

The past decade has seen the development of Direct Broadcast Satellite (DBS) services for providing video, audio, data, and other program material to subscribers. The electromagnetic spectrum allocated for DBS in the United States has been limited to 500 MHz. This constraint limits the maximum number of channels that existing DBS  
15 service can offer from one geostationary orbit (GSO) slot, since each video channel typically occupies about 2-6 MHz of bandwidth, depending on the data rates. This shortage of spectrum/channels becomes worse with the emerging demand for High Definition TV (HDTV) which requires much higher bandwidth per channel than traditional video channels. The shortage of spectrum and channels is made even more  
20 apparent with the recent approval for DBS operators to provide local programming. There are an estimated 200 or more local TV stations spreading over the domestic markets, and DBS operators will not be able to cover all cities through their existing fleet of satellites, if the demand on extending channel numbers continue to grow.

One possible solution is to use another GSO orbital slot for DBS services.

25 However, using another GSO slot is not a permanent solution, because the 9 degree orbit slot spacing requirement for satellites broadcasting at DBS frequencies allow only few slots for given service regions (e.g. the continental United States, or CONUS) and these orbital slots are almost all taken.

Another possible solution is to use different or additional frequency bands to  
30 transmit the additional information. Unfortunately, this solution requires that each subscriber's receiver include additional circuitry to detect and demodulate the information

on the additional frequency bands. Further, this solution faces the formidable task of overcoming the regulatory process to acquire the required spectrum.

What is needed is a system and method for providing high bandwidth DBS services that augment current DBS systems in a non-interfering way. The present invention satisfies that need.

### SUMMARY OF THE INVENTION

To address the requirements described above, the present invention discloses a method and apparatus for providing at least near continuous broadcast services to one or more terrestrial receiver stations. The system comprises a plurality of satellites, each satellite in an inclined, elliptical geosynchronous orbit, each satellite providing a portion of the at least near continuous broadcast service to the terrestrial receiver. In one embodiment, the system also comprises a receiver station having a legacy antenna modified so as to include a sensitivity pattern substantially matched to the track of the apparent position of the satellites actively broadcasting information to the receiver stations. The present invention is also embodied in a method for receiving at least near continuous broadcast service from at least one of a plurality of satellites at a time, each satellite in an inclined, elliptical, geosynchronous orbit.

### BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the drawings in which like reference numbers represent corresponding parts throughout:

FIG. 1 is a diagram illustrating an overview of a video distribution system;

FIG. 2 is a diagram showing one embodiment of a satellite constellation of an enhanced video distribution system using the principles of the present invention;

FIG. 3 is a diagram illustrating the ground track of the orbit of a satellite in the augmenting satellite constellation;

FIG. 4 is a diagram presenting a polar fish-eye view of the apparent position of the augmented satellite constellation over an 8-hour period;

FIG. 5 is a diagram presenting a polar view of the satellite track from a location in CONUS;

FIG. 6 is a diagram showing an augmented receiver station design;

FIG. 7A is a cross sectional diagram of an augmented receiver station antenna;

5      FIG. 7B is a plot of a teardrop-shaped sensitivity pattern of the antenna depicted in FIG. 7A;

FIG. 8 is a plot of CONUS contours seen from an active satellite at boundary points in the satellite's apparent position within the active period; and

10      FIG. 9 illustrates a sample satellite transmission beam shaped to follow the outer contour of CONUS.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In the following description, reference is made to the accompanying drawings which form a part hereof, and which is shown, by way of illustration, several  
15      embodiments of the present invention. It is understood that other embodiments may be utilized and structural changes may be made without departing from the scope of the present invention.

#### Video Distribution System

20      FIG. 1 is a diagram illustrating an overview of a video distribution system 100. The video distribution system 100 comprises a control center 102 in communication with an uplink center 104 via a ground or other link 114 and an integrated receiver/decoder (IRD) 132 at terrestrial receiver station 130 via a public switched telephone network (PSTN) or other link 120. The control center 102 provides program material to the uplink  
25      center 104, coordinates with the receiver station 130 to offer subscribers 110 pay-per-view (PPV) program services, including billing and associated decryption of video programs.

The uplink center 104 receives program material and program control information from the control center 102, and using an uplink antenna 106, transmits the program  
30      material and program control information to a geostationary satellite 108. The satellite

108 receives and processes this information, and transmits the video programs and control information to the IRD 132 and a communicatively coupled receiver station antenna 112 at the receiver station 130 via downlink 118. The IRD 132 receives this information using a communicatively coupled subscriber antenna 112.

5           The video distribution system 100 can comprise a plurality of satellites 108 in order to provide wider terrestrial coverage, to provide additional channels, or to provide additional bandwidth per channel. In one embodiment of the invention, each satellite comprises 16 transponders to receive and transmit program material and other control data from the uplink center 104 and provide it to the subscribers 110. However, using  
10       data compression and multiplexing techniques the channel capabilities are far greater. For example, two-satellites 108 working together can receive and broadcast over 150 conventional (non-HDTV) audio and video channels via 32 transponders.

          While the invention disclosed herein will be described with reference to a satellite based video distribution system 100, the present invention may also be practiced with  
15       terrestrial-based transmission of program information, whether by traditional broadcasting means, cable, or other means. Further, the different functions collectively allocated among the control center 102 and the uplink center 104 as described above can be reallocated as desired without departing from the intended scope of the present invention.

          Although the foregoing has been described with respect to an embodiment in  
20       which the program material delivered to the subscriber is video (and audio) program material such as a movie, the foregoing method can be used to deliver program material comprising purely audio information or data as well.

          The foregoing video distribution system 100 provides continuous broadcast services using geostationary satellites 108. Since the apparent position of the satellites in  
25       the sky does not move, inexpensive stationary ground antennae can be used to receive the broadcast signal. However, as described above, the number of channels available in such a system is limited by the allocation of broadcast bandwidth and the number of geostationary satellite orbital slots. The present invention provides the additional broadcast bandwidth with a satellite constellation that is compatible with existing DBS  
30       broadcast systems.

There are typically three configurations that allow a terrestrial receiver station 130, whether mobile or stationary, to communicate with satellites 108. First, the receiver station 130 may point in a fixed direction at a geostationary satellite (e.g legacy satellite 204), whose apparent position in the sky remains stationary over time. Second, the receiver station 130 may be equipped with antennae 112 and other equipment that allows tracking a non-geostationary satellite (such as a low earth orbit or mid earth orbit satellite) as the apparent position of the satellite moves in the sky over time. Third, the receiver station 130 may have an omni-directional antenna. Unfortunately, all of these configurations have drawbacks. The drawback of the first configuration is that they are generally usable only with geostationary satellites, and orbital slots for geostationary satellites are a precious commodity. One drawback of the second configuration is that it requires expensive receiver station 130 equipment. One drawback of the second configuration is that it is difficult to use for two way communications between the receiver station 130 and the satellite 108, and the low gains inherent with omnidirectional antennae place greater demands on the receiver and transmitter subsystems of the satellite 108 and the IRD 132.

### Enhanced Video Distribution System

FIG. 2 is a diagram showing one embodiment of a satellite constellation of an enhanced video distribution system 200 using the principles of the present invention. The enhanced video distribution system comprises one or more legacy satellites 108 in a geostationary orbit around the Earth 206, and an augmenting satellite constellation 203 of three or more satellites 202A-202C (hereinafter alternatively referred to as satellite(s) 202) which are in inclined, substantially elliptical, geo-synchronous orbits with objective service at or near the center of CONUS. Each satellite 202 provides an active period of about 8 hours of broadcast service per day. The constellation 203 is phased so that when an active satellite 202 (which is currently providing the broadcast service) is no longer able to do so, the broadcast service function is handed over to the next satellite 202 entering the region over the service area. Since there is always at least one active satellite 202 available, continuous, 24 hours a day coverage is provided. In one embodiment, the

orbital parameters for the augmenting satellite constellation 203 are as shown in Table I below:

Longitude	97 degrees West
Period	86164.09 Seconds
Inclination	50 degrees
Eccentricity	0.13
Altitude at Perigee	30305 Km
Altitude at Apogee	41268 Km
Phase difference between adjacent orbital planes	120 degrees

Table I

FIG. 3 is a diagram illustrating the ground track 302 of the orbit of the satellite 202 specified in Table I, centered at the geographical center of CONUS for an 8-hour period when the satellite is providing broadcast services to a subscriber. The outside rings 304 show 57 degree elevation contours at 10 minute intervals within the active period. Note that all of CONUS (all 48 states) are covered within the 57 degree elevation angle. The ground track 302 of the orbit of the satellite 202 is a closed loop in a (reversed) teardrop shape. This eliminates sudden shifts in the apparent position of the active satellite (as the task of transmitting the broadcast signal is shifted from a first satellite (e.g. 202A) to a second satellite (e.g. 202B) in the constellation) and thus allows an IRD 132 with a fixed (non tracking) receiver station antenna 112 to receive uninterrupted service from the satellite constellation.

The enhanced video distribution system 200 of the present invention has several advantages over the systems described above. The receiver station 132 maintains relatively high gain and a fixed antenna configuration, yet is still capable of communicating with non-GSO satellites. The augmenting constellation 203 is designed to minimize the apparent motion of the constellation 203 member satellites 202 in the sky so that so that the sensitivity pattern of a stationary receiver station antenna 112 is



sufficient to receive the broadcast signal from at least one of the augmenting constellation 203 satellite 202 members at any given time.

The augmenting satellite constellation 203 of the video distribution system 100 provides not only an optimized coverage for receiver stations 130 within CONUS but also minimizes the footprint of the apparent satellite position over time. This allows the use of receiver station antennae 112 which offer relatively high gain and low beamwidth. Further, the augmenting satellite constellation 203 presents apparent satellite positions that are sufficiently disposed away from the apparent positions of GSO satellites. This allows the video distribution system 100 to operate with existing GSO distribution systems without interference. Finally, as will be discussed later, the teardrop shape of the apparent position of the active satellite 202 over time during the active period substantially coincides with a teardrop sensitivity pattern of the receiver station antennae.

FIG. 4 is a diagram presenting polar fish-eye views of the apparent position of the satellite 202 members of the augmenting satellite constellation 203 over an 8-hour period, for three representative cities within CONUS (Los Angeles, Houston, and New York). As is shown, the shape of the track of the apparent position of the satellite 402A-402C (hereinafter alternatively referred to as satellite tracks 402) in the sky over time is consistently teardrop shaped. Further, the satellite tracks 402 exhibit a wide spatial separation away from the apparent position of the satellite 202 apparent position of existing GSO satellites. In particular, FIG. 4 shows that the minimum angular separation satellite tracks 402 and a representative DBS satellite in a GEO orbit (101 degrees West) at least thirty degrees. This design achieves a balance between the requirements of high elevation angle and simplicity of antenna pointing.

FIG. 4 also shows the sensitivity pattern (essentially, the beamwidth) for the receiver station antenna 112 for existing DBS services 408A-408C. Since the geostationary satellites of the existing DBS service are effectively motionless in the sky, the beamwidth 408A-408C (hereinafter alternatively referred to as beamwidth 408) of the receiver station antennae 112 used to receive signals from the legacy satellite(s) 204 is only approximately 3.33 degrees, and the gain of the receiving station antenna is approximately 34 dBi. The satellites 202 of the augmenting satellite constellation 203,

however do not retain a fixed apparent position in the sky, but rather move about. Consequently, the beamwidth 404A-404C (hereinafter referred to as beamwidth 404) of the receiver station antennae 112 used to receive signals from the satellites 202 in the augmenting constellation 203 is wider. In one embodiment, the beamwidth

5 approximately 22 degrees by 8 degrees, and can be elliptically or teardrop shaped. Since the receiver station antennae 112 is used to cover a greater portion of the sky, the gain of the antenna is lower than that which is used to receive signals from the legacy satellites. In one embodiment, the gain is approximately 22 dBi. Hence, the overall gain of the receiver station antennae 112 is nominally about 12 dB less than standard DBS receiver

10 station antennae. This lower gain can be accommodated by using multiple spot beams from the satellites 204, by increasing transmitter power, by increasing the size of the reflector of the antenna at the receiver station, or by similar methods.

#### Tracking Antennae for Gateway or High Data Rate Receiver Station Applications

15 While the augmenting constellation 203 of the present invention obviates the need for the use of receiver station antennae 112 that can track a satellite 108 across the sky, the ability of the receiver antenna 112 to track a satellite across the sky can still be valuable for some applications. For example, in typical broadcast applications, the size of the receiver station antenna 112 is kept small to ease installation difficulties. This

20 negatively affects the gain of the receiver station antenna 112, and the power of the signal transmitted from the satellite 108 is adjusted to take this into account. However, where two way communications between the receiver station 130 (essentially rendering it a receiver/transmitter station or gateway) and the satellite are desired (e.g. for high-

25 bandwidth Internet and data transfer applications), the smaller size of the receiver station antenna 112 can be problematic, because it negatively affects the strength of the signal transmitted from the receiver station 130. In such situations, it may be advantageous for the antenna at the gateway to track satellites 108 across the sky during service.

The augmenting satellite constellation 203 is designed so that when an active satellite 202 is about to finish its service, its apparent position in the sky relative to the

30 receiver station 130 substantially overlaps with another satellite 202 in the constellation

203 rising and about to enter active service. This allows the receiver station antenna 112 to continue ground tracking without re-steering or experiencing temporary data drop-outs, thus saving the time for tracking and handover.

FIG. 5 is a diagram presenting a polar view of the satellite track 402A from a location in CONUS (e.g. Los Angeles). The receiver station antenna at the gateway 112G tracks the active satellite 202 during service, following an essentially teardrop path in a clockwise direction. When the active satellite 202 is about to complete service, the next satellite 202 in the constellation 203 is at or near the same apparent position along the satellite track 402A. Small discrepancies between the apparent location of the active satellite 202 and the rising satellite 202 are not problematic, so long as the beamwidth of the gateway antenna 112G is sufficient to encompass both the active satellite 202 and the rising satellite 202 at the same time. The high predictability of the satellite track 402 also allows for simplified gateway antenna 112G design, and the ability to predict where the rising satellite 202 should appear when handoff is necessary.

An important feature of the constellation 203 of the present invention is that it creates satellite tracks 402 that are essentially closed-loop. For a specific orbital period (and hence, service period for each satellite 202) there is only one constellation 203 that can be defined. The constellation 203 described above not only offers the closed loop satellite track 402 feature that simplifies receiver antenna 112 design, it also meets the required elevation angle for servicing subscribers 110 in CONUS and maintains an adequate separation angle from satellites in geostationary orbits.

#### Dual Capability Receiver Station

One significant advantage of the present invention is that it can be applied to existing receiver station 130 designs. This allows service capacity to be essentially doubled with minor modifications of existing hardware to add an additional receiving head or LNB and providing an intelligent switch.

FIG. 6 is a diagram showing an augmented receiver station 600 design. A baseline receiver station antenna 112 comprises a reflector 602 which is nominally about 45 cm in diameter and a first LNB 604 powered by the IRD 132 via a cable connection.

This configuration results in an baseline antenna sensitivity pattern 606. This configuration results in an approximate gain of 34 dBi, and is used to communicate with the satellites in geostationary orbit (GSO satellites). The augmented receiver station antenna 608 further comprises a second LNB 610 offset from the first LNB 604, resulting in a second antenna sensitivity pattern 612 which is non-symmetric and covers the movement of the satellites in the augmenting satellite constellation 203 when each of the augmenting satellites 202 are in the active period. This configuration has an approximate gain of 22dBi, and is used to communicate with the (NGSO) satellites in the augmenting satellite constellation 203. Signals are received via the first LNB 604 and second LNB 610 according to a switch controlled by the IRD 132.

The reduced gain inherent in the augmented receiver station (22dBi versus 34 dBi) may be compensated for by increasing the output of the signal from the satellites in the augmenting constellation

The foregoing can be implemented with a simple clip on LNB head, or a minor replacement to legacy LNBs. To maximize performance, the location of the second LNB 610 can be varied according to the geographical location of the subscriber 110.

FIG. 7A is a cross sectional diagram of an augmented receiver station antenna 608. The reflector 602 of the antenna 608 can be characterized by a focal plane 702, representing the locus of points at the focus of the parabolic reflector 602. A vertically oriented focal line 704 and a focal point 605 at the along the centerline 603 of the parabolic reflector 602 can be defined on the focal plane 702. In the embodiment illustrated in FIG. 7A, the second LNB 610 is offset a first distance  $d_1$  from the focal point 605 of the parabolic reflector, offset a first distance  $d_2$  from the location of the first LNB 606 along the focal line 704 and offset a distance  $d_3$  perpendicularly away from the focal line 704. In one embodiment,  $d_1$  is approximately seven inches, and  $d_3$  is approximately four inches. This design generates the reverse teardrop-shaped sensitivity pattern shown in FIG. 7B, and covers the movement of the active satellite 202 in the augmenting satellite constellation 203. Hence, by matching the sensitivity pattern of the antenna 608 with the apparent motion of the active satellite 202, a receiver station can be constructed that does not require active tracking of the satellite. While the foregoing

shows an implementation using two separate LNBS, the present invention may be practiced using a single integrated LNB.

In addition to facilitating the design of a simplified receiver station, the augmenting satellite constellation 203 also achieves the highest elevation for coverage focusing at CONUS. Impact of the apparent motion of the satellites 202 is now discussed.

FIG. 8 is a plot of four CONUS contours 802A-802D as seen from the active satellite 202 at four boundary points in the satellite's apparent position within the 8-hour active period. If the satellite 202 can steer its beam to minimize the gain degradation due to movement, then the shapes of CONUS, after new steering by aiming to the center of the desired coverage area, will be covered through a general shape marked by the outside contour 804. Any point at the CONUS within this 8-hour active period, the receiving station can see at least one satellite 202 at a minimum elevation of  $57^\circ$ . Since these satellites 202 are in a non-circular orbits (nominal eccentricity of 0.13) the satellites also change altitude during the active period, but this change of altitude does not cause major contours. Hence, the design of spacecraft 202 antenna is similar to that of legacy satellite 204.

FIG. 9 illustrates sample satellite transmission beam shaped to follow the outer contour 804 shown in FIG. 8. Spot beams (which can offer local programs to regional areas) may also be utilized.

As can be seen, the present invention can be implemented while minimizing changes to existing user equipment through add-on receiver station 130 components, and the augmenting satellite constellation 203. The system requires only two additional hardware components to double the reception capacity provided to the receiver station 130: an add-on kit for the receiving antenna 112, and an intelligent switch to select the signal received from the legacy satellites 104 by the first LNB 606 from the augmenting satellites 202 by the second LNB 610. The intelligent switch may be integrated with other antenna components or with the IRD 132.

As described above, an important advantage of the present invention is that it allows the, antennae, converters, and set top boxes used by current GSO satellites to be

used for additional capacity without interference. In addition to these advantages, the present invention allows the augmenting satellite constellation 203 to share the electromagnetic spectrum with the legacy satellites 204. The satellites 202 in the augmenting satellite constellation 203 achieve a minimum 30° spatial separation to avoid the signals from the legacy satellites 204. When a member satellite 202 of the augmenting satellite constellation 203 flies through lower latitude regions during the non-active period, the satellite ceases the transmission of signals in the shared spectrum to avoid harmful interference with legacy satellite 204 transmission. The satellite 202 remains in a stand-by mode until it leaves the lower latitude regions and becomes active. The spatial separation away from legacy satellites 204 (at least 30°) provides large (-30 dB) antenna discrimination, which prevents interference.

The present invention can be used to provide additional bandwidth to nearly any broadcast service provided by satellites in geostationary orbits. The augmenting satellite constellation 203 provides improved capacity, improved reception (due to the higher elevation), and reduced cost (since management and other ground functions can be shared with other GSO systems).

### Conclusion

The foregoing description of the preferred embodiment of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be limited not by this detailed description, but rather by the claims appended hereto. The above specification, examples and data provide a complete description of the manufacture and use of the composition of the invention. Since many embodiments of the invention can be made without departing from the spirit and scope of the invention, the invention resides in the claims hereinafter appended.

## CLAIMS

### What is Claimed is:

1           1.       A system for providing at least near continuous broadcast service to a  
2 terrestrial receiver, comprising:  
3           a plurality of satellites, each satellite in an inclined, elliptical, geosynchronous  
4 orbit, each satellite providing a portion of time of the at least near continuous broadcast  
5 service to the terrestrial receiver.

1           2.       The system of Claim 1, wherein the plurality of satellites comprises a first  
2 satellite actively servicing the terrestrial receiver, and a second satellite, wherein an  
3 apparent position of the second satellite relative to the terrestrial receiver is substantially  
4 proximate the apparent position of the first satellite relative to the terrestrial receiver  
5 when the first satellite completes providing its portion of the broadcast service.

1           3.       The system of Claim 1, wherein a track of the apparent position of each of  
2 the satellites relative to the terrestrial receivers when the satellite is providing its portion  
3 of the at least near continuous broadcast service is substantially closed loop.

1           4.       The system of Claim 3, wherein the terrestrial receiver comprises an  
2 antenna having a sensitivity characteristic substantially corresponding to the track of the  
3 apparent position of each of the satellites.

1           5.       The system of Claim 3, wherein the track of the apparent position of each  
2 of the satellites substantially corresponds to a sensitivity pattern of an antenna at the  
3 terrestrial receiver.

1           6.       The system of Claim 1, wherein a track of the apparent position of each of  
2 the satellites relative to the terrestrial receivers when the satellite is providing its portion  
3 of the at least near continuous broadcast service is substantially teardrop-shaped.

1           7.       The system of Claim 1, wherein the satellite orbits are characterized by an  
2 orbital inclination approximately equal to 50 degrees and an eccentricity approximately  
3 equal to 0.13.

1           8.       The system of Claim 7, wherein the satellite orbits are further  
2 characterized by a period approximately equal to 86164 seconds, an altitude at perigee  
3 approximately equal to 30305 kilometers, and an altitude at apogee approximately equal  
4 to 41268 kilometers.

1           9.       A receiver station for receiving at least near continuous broadcast service  
2 from a plurality of satellites in an inclined, elliptical, geosynchronous orbit, comprising:  
3           an antenna having a sensitivity characteristic substantially corresponding to the  
4 track of the apparent position of each of the satellites.

1           10.      The receiver station of Claim 9, wherein the receiver antenna comprises a  
2 reflector having a focal line and a focal point on the focal line and a head, wherein the  
3 head is disposed offset from the focal point.

1           11.      The receiver station of Claim 10, wherein the head is disposed offset from  
2 the focal line.

1           12.      The receiver station of Claim 11, wherein the reflector is approximately 18  
2 centimeters in diameter, and the head is disposed approximately 7 inches offset from the  
3 focal point and approximately 4 inches offset from the focal line.



1           13.     The receiver station of Claim 12, further comprising a second head  
2 disposed substantially at the focal point.

1           14.     The receiver station of Claim 13, wherein the second head receives signals  
2 from a geostationary satellite.

1           15.     The receiver station of Claim 9, wherein the plurality of satellites  
2 comprises a first satellite actively servicing the terrestrial receiver, and a second satellite,  
3 wherein the apparent position of the second satellite relative to the terrestrial receiver is  
4 substantially proximate the apparent position of the first satellite relative to the terrestrial  
5 receiver when the first satellite completes providing its portion of the broadcast service.

1           16.     A method of providing at least near continuous broadcast service to a  
2 terrestrial receiver, comprising the steps of:  
3           providing a signal having a portion of the continuous broadcast service from at  
4 least one of a plurality of satellites at a time, each satellite in an inclined, elliptical,  
5 geosynchronous orbit.

1           17.     The method of Claim 16, wherein the plurality of satellites comprises a  
2 first satellite actively servicing the terrestrial receiver, and a second satellite, wherein an  
3 apparent position of the second satellite relative to the terrestrial receiver is substantially  
4 proximate the apparent position of the first satellite relative to the terrestrial receiver  
5 when the first satellite completes providing its portion of the broadcast service.

1           18.     The method of Claim 16, wherein a track of the apparent position of the  
2 each of the satellites relative to the terrestrial receivers when the satellite is providing its  
3 portion of the at least near continuous broadcast service is substantially closed loop.

1           19.     The method of Claim 18, wherein the terrestrial receiver comprises an  
2 antenna having a sensitivity characteristic substantially corresponding to the track of the  
3 apparent position of each of the satellites.

1           20.     The method of Claim 18, wherein the track of the apparent position of  
2 each of the satellites substantially corresponds to a sensitivity pattern of an antenna at the  
3 terrestrial receiver.

1           21.     The method of Claim 16, wherein a track of the apparent position of the  
2 each of the satellites relative to the terrestrial receivers when the satellite is providing its  
3 portion of the at least near continuous broadcast service is substantially teardrop-shaped.

1           22.     The method of Claim 16, wherein the satellite orbits are characterized by  
2 an orbital inclination approximately equal to 50 degrees and an eccentricity  
3 approximately equal to 0.13.

1           23.     The method of Claim 20, wherein the satellite orbits are further  
2 characterized by a period approximately equal to 86164 seconds, an altitude at perigee  
3 equal to approximately 30305 kilometers, and an altitude at apogee approximately equal  
4 to 41268 kilometers.

1           24.     A method of receiving at least near continuous broadcast service at a  
2 terrestrial receiver, comprising the steps of:  
3           receiving a signal having a portion of the continuous broadcast service from at  
4 least one of a plurality of satellites at a time, each satellite in an inclined, elliptical,  
5 geosynchronous orbit.

1           25.     The method of Claim 24, wherein the plurality of satellites comprises a  
2     first satellite and a second satellite and wherein the step of providing a signal having a  
3     portion of the continuous broadcast service from at least one of the plurality of satellites  
4     at a time comprises the steps of:

5           receiving a signal from the first satellite actively servicing the terrestrial receiver;  
6     and

7           receiving a signal from the second satellite when the apparent position of the  
8     second satellite relative to the terrestrial receiver is proximate the apparent position of the  
9     first satellite relative to the terrestrial receiver.

1           26.     The method of Claim 24, wherein the plurality of satellites comprises a  
2     first satellite actively servicing the terrestrial receiver, and a second satellite, wherein an  
3     apparent position of the second satellite relative to the terrestrial receiver is proximate the  
4     apparent position of the first satellite relative to the terrestrial receiver when the first  
5     satellite completes providing its portion of the broadcast service.

1           27.     The method of Claim 24, wherein a track of the apparent position of the  
2     each of the satellites relative to the terrestrial receivers when the satellite is providing its  
3     portion of the at least near continuous broadcast service is closed loop.

1           28.     The system of Claim 27, wherein the terrestrial receiver comprises an  
2     antenna having a sensitivity characteristic corresponding to the track of the apparent  
3     position of each of the satellites.

1           29.     The system of Claim 27, wherein the track of the apparent position of each  
2     of the satellites corresponds to a sensitivity pattern of an antenna at the terrestrial receiver.

1           30.     The method of Claim 24, wherein a track of the apparent position of the  
2     each of the satellites relative to the terrestrial receivers when the satellite is providing its  
3     portion of the at least near continuous broadcast service is teardrop-shaped.

1           31.     The method of Claim 24, wherein the satellite orbits are characterized by  
2     an orbital inclination equal to 50 degrees and an eccentricity equal to 0.13.

1           32.     The method of Claim 31, wherein the satellite orbits are further  
2     characterized by a period equal to 86164 seconds, an altitude at perigee equal to 30305  
3     kilometers, and an altitude at apogee equal to 41268 kilometers.


11/01/2015 11:01:00 AM C:\Users\user\AppData\Local\Microsoft\Windows\Temporary Internet Files\Content.IE5\B7QJ6Q1K\11-01-2015 11-01-00 AM

SYSTEM AND METHOD FOR CONTINUOUS BROADCAST SERVICE FROM  
NON-GEOSTATIONARY ORBITS

ABSTRACT OF THE DISCLOSURE

5 A method, apparatus for providing at least near continuous broadcast services to one or more terrestrial receiver stations is disclosed. The system comprises a plurality of satellites, each satellite in an inclined, elliptical geosynchronous orbit, each satellite providing a portion of the at least near continuous broadcast service to the terrestrial receiver. In one embodiment, the system also comprises a receiver station having an  
10 legacy antenna modified so as to include a sensitivity pattern substantially matched to the track of the apparent position of the satellites actively broadcasting information to the receiver stations. The present invention is also embodied in a method for receiving at least near continuous broadcast service from at least one of a plurality of satellites at a time, each satellite in an inclined, elliptical, geosynchronous orbit.

15

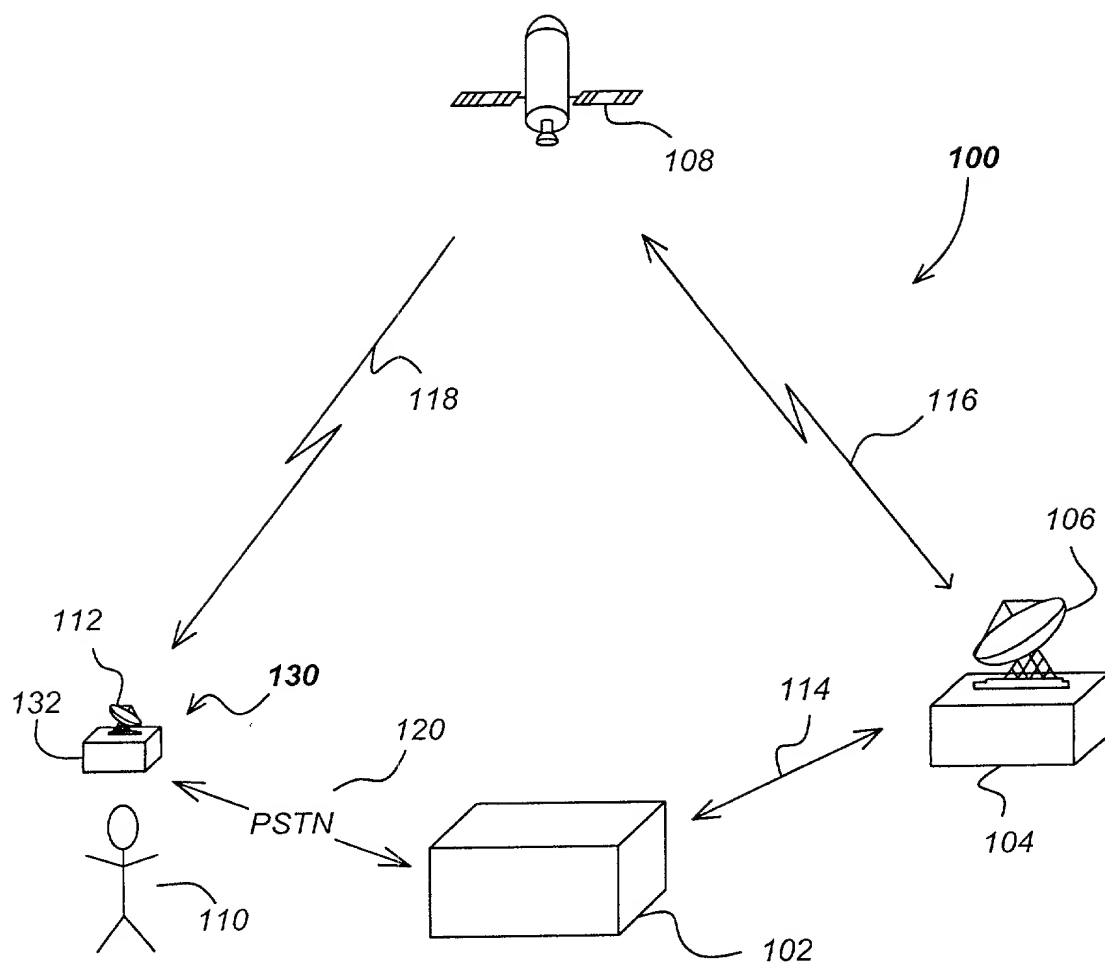

**FIG. 1**

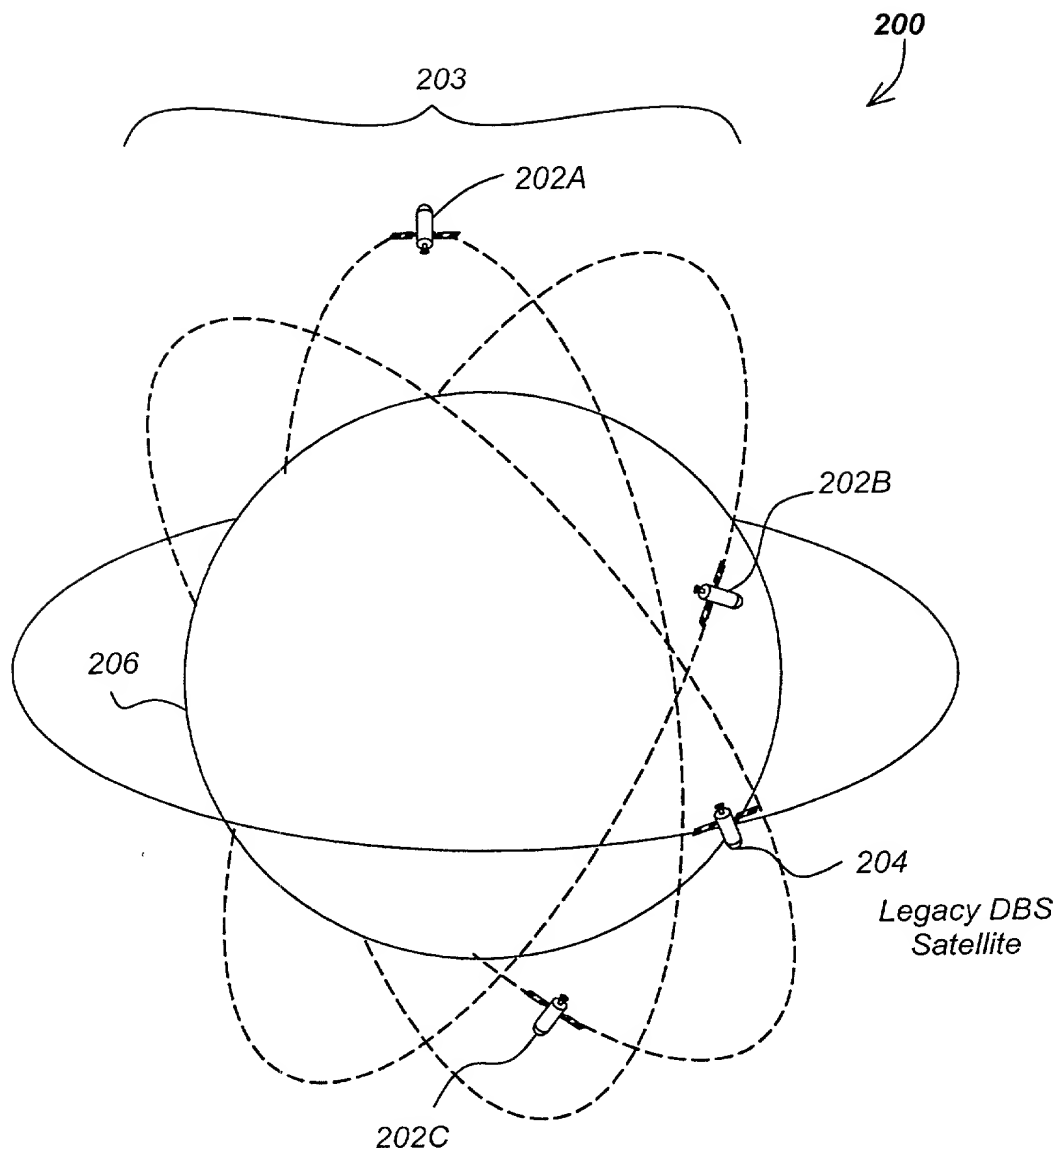


FIG. 2

FIG. 3 is a map of the United States and surrounding regions showing 57 degree elevation contours for 8 hours. The map includes latitude and longitude markings. A specific area in the central United States is highlighted with a circle and labeled 302. Another area in the upper left is labeled 304.

57 Deg. Elev. Contours for 8 Hours

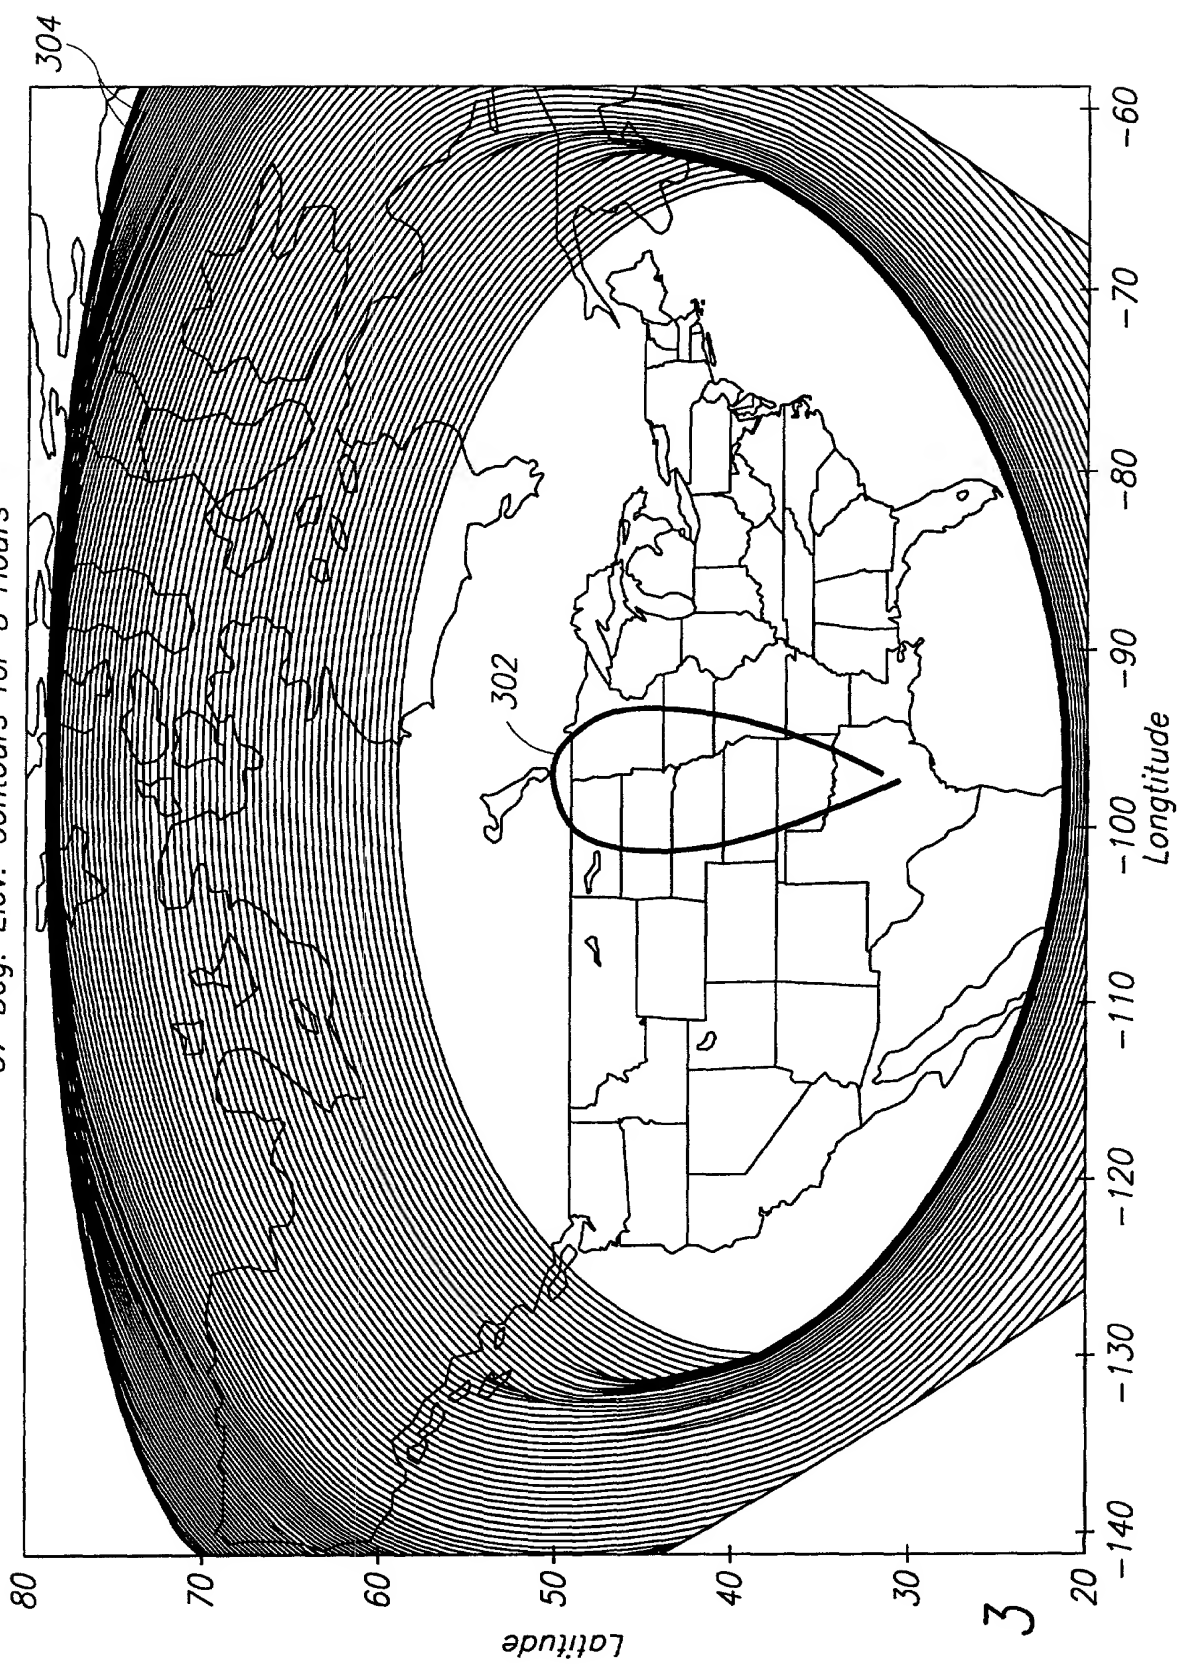


FIG. 3



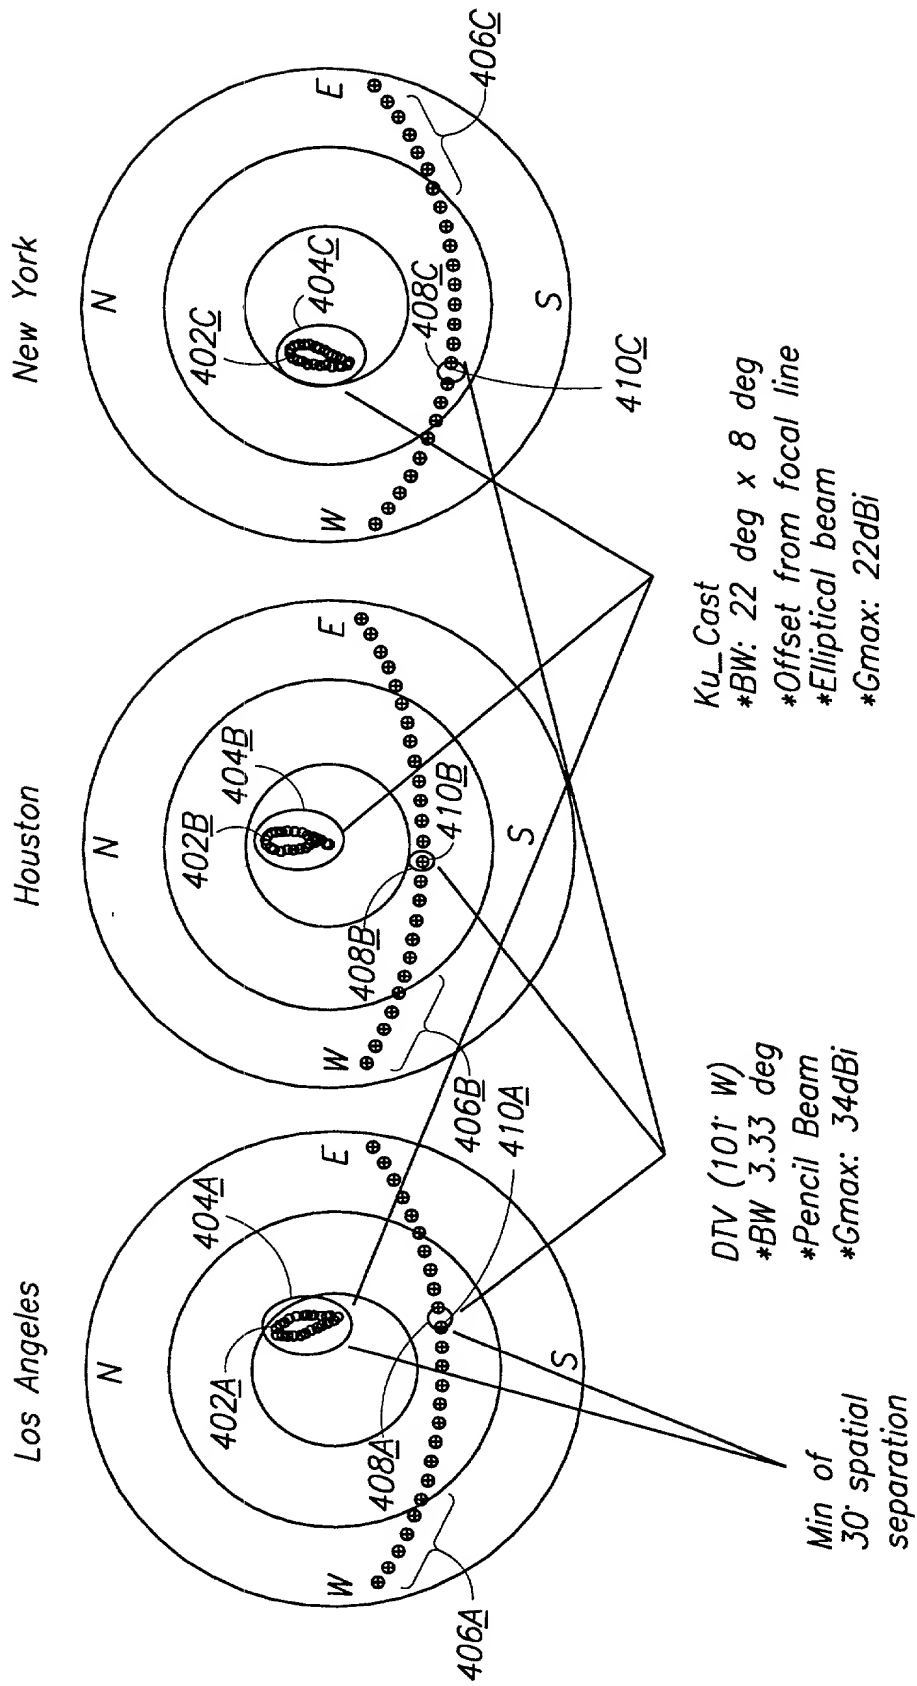


FIG. 4

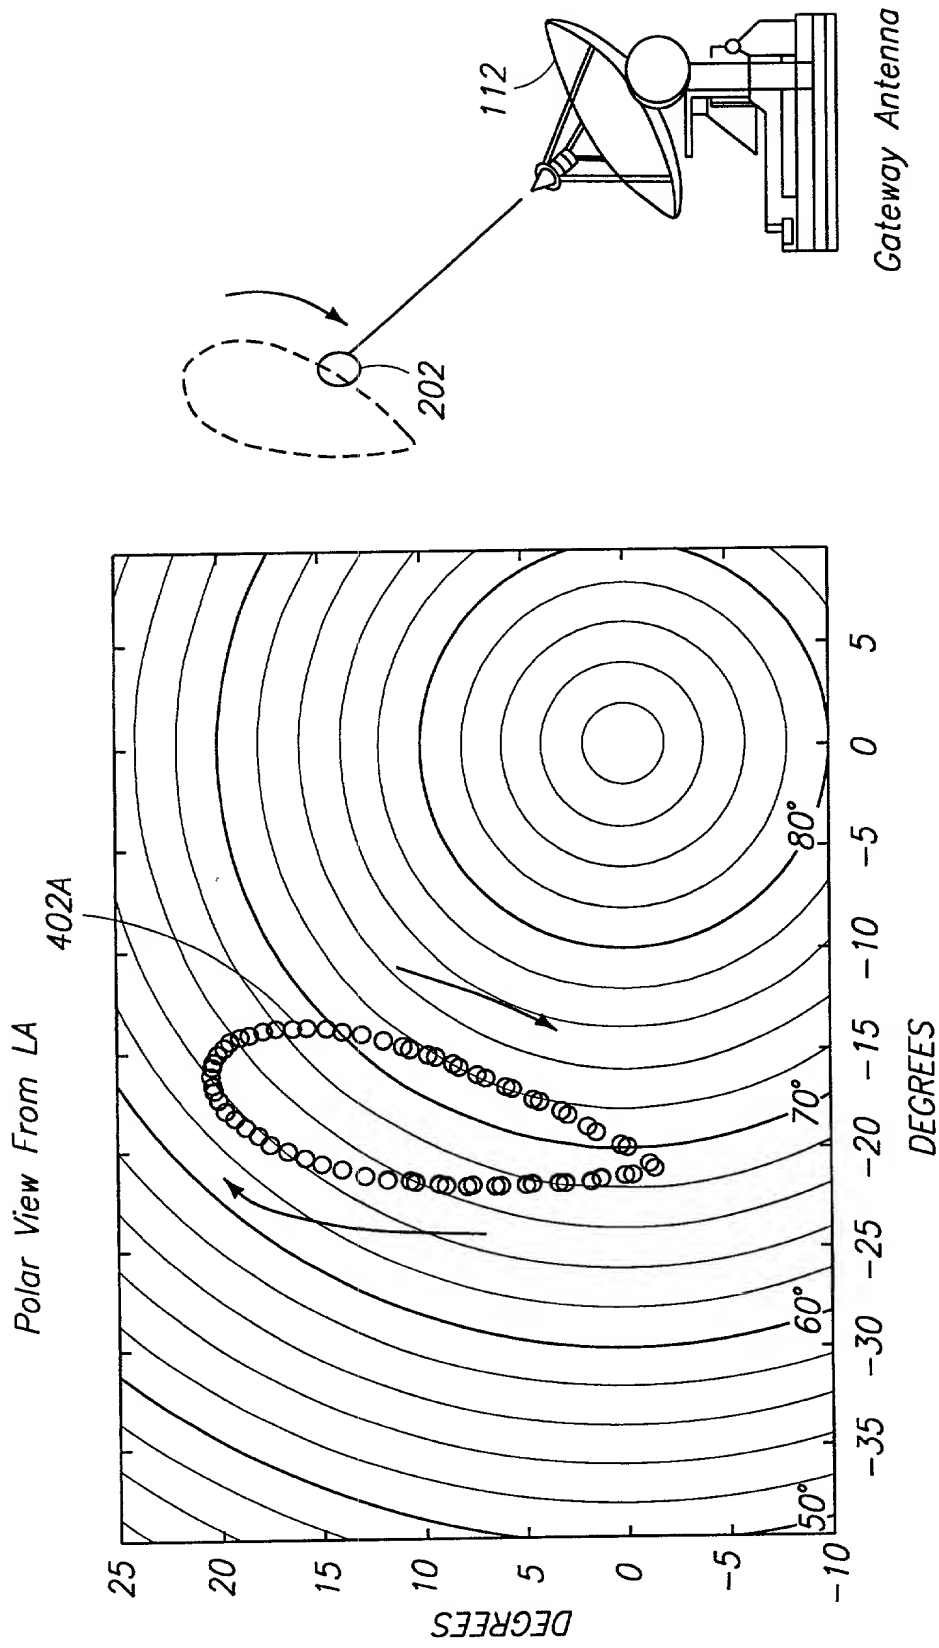


FIG. 5

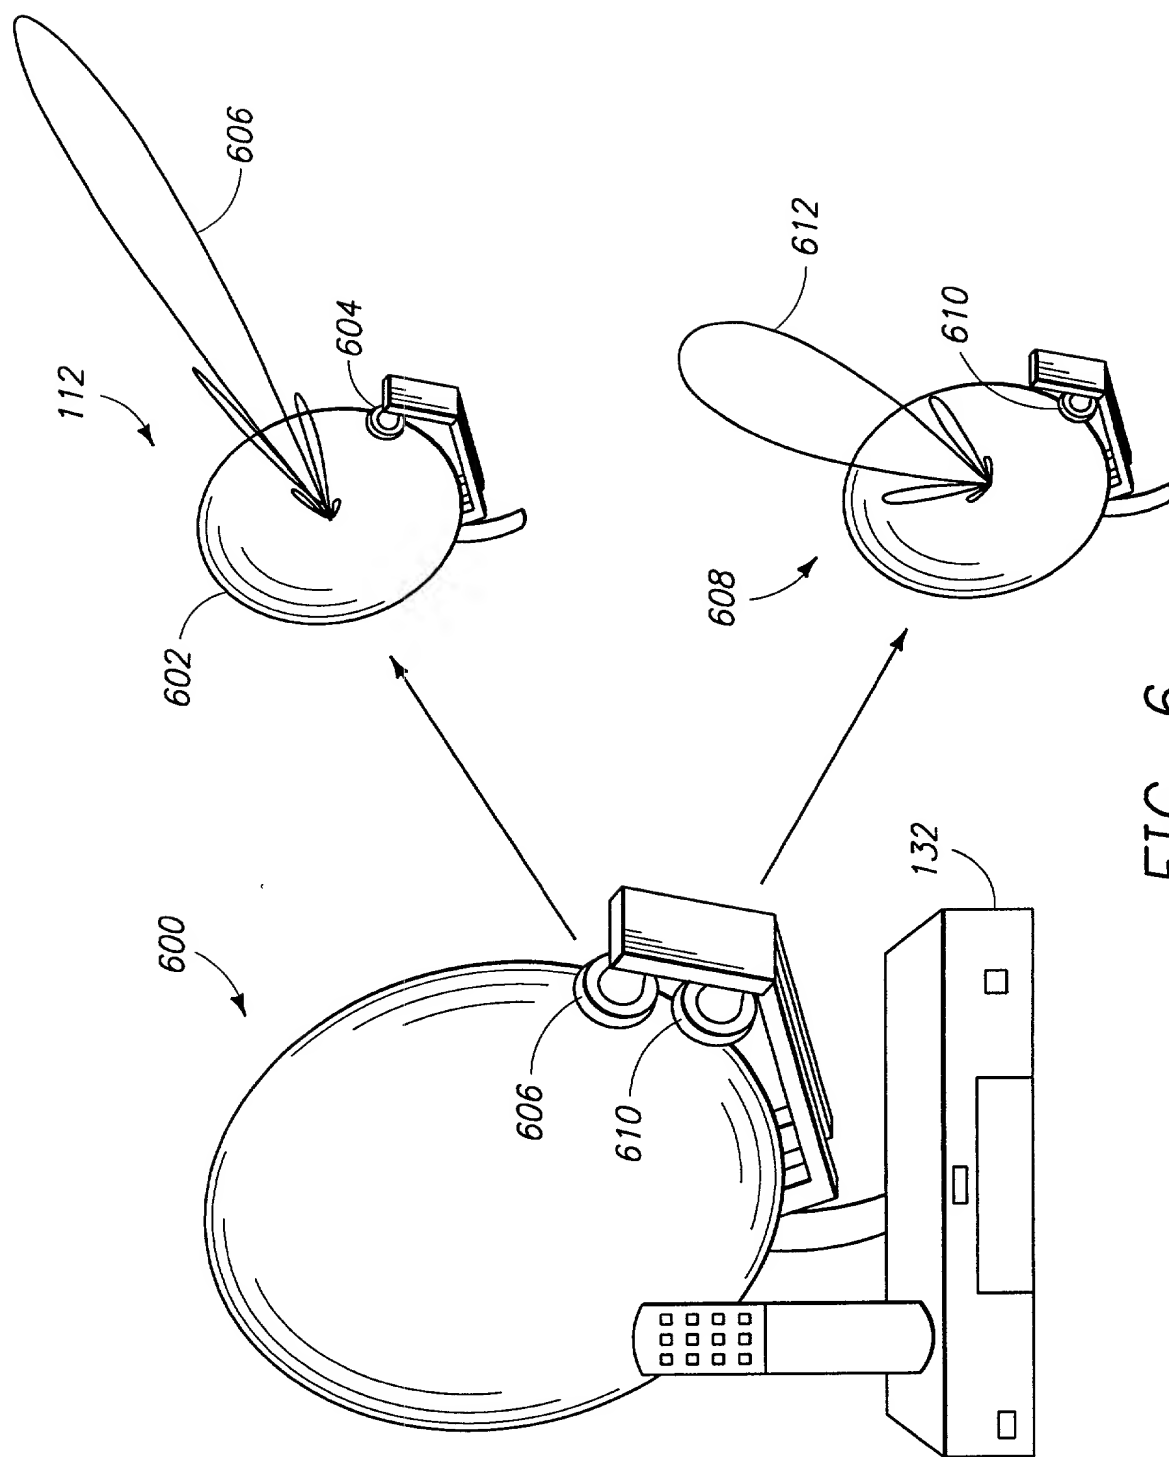


FIG. 6

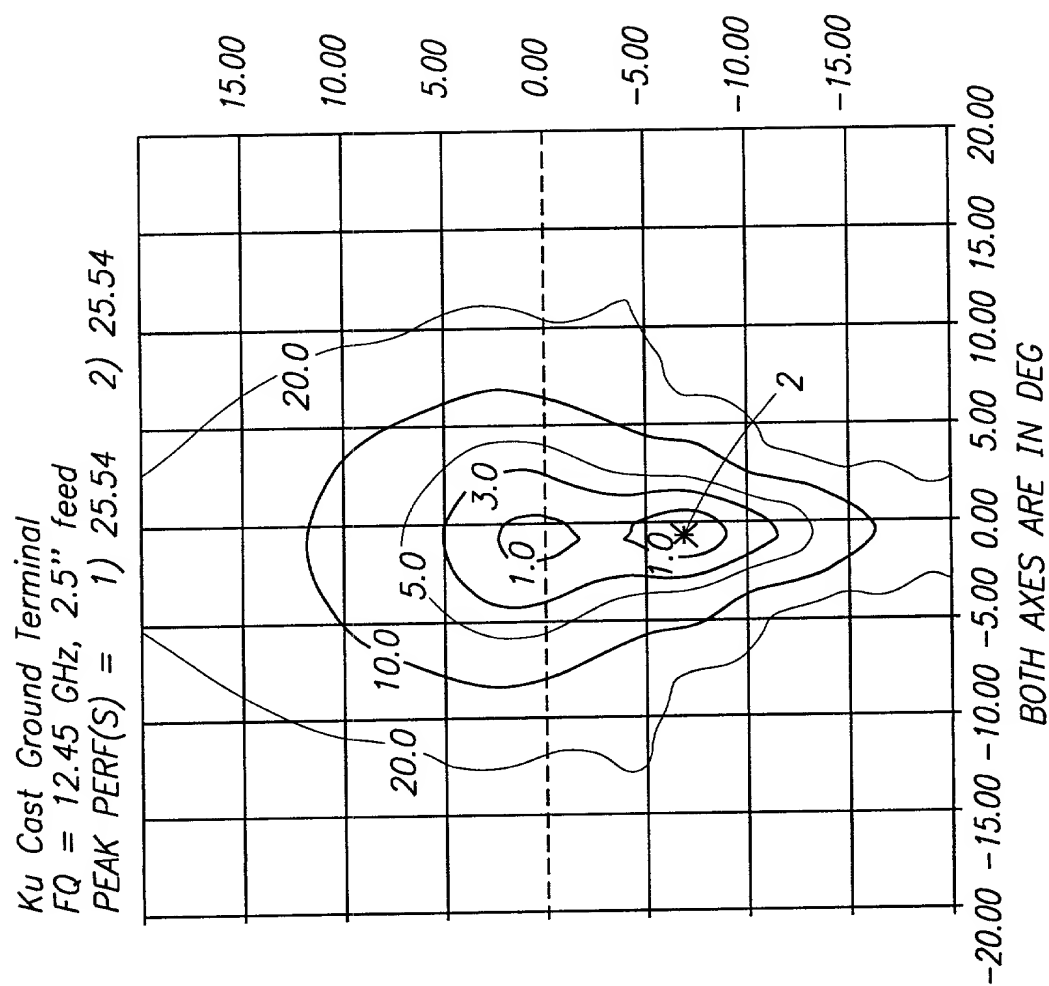
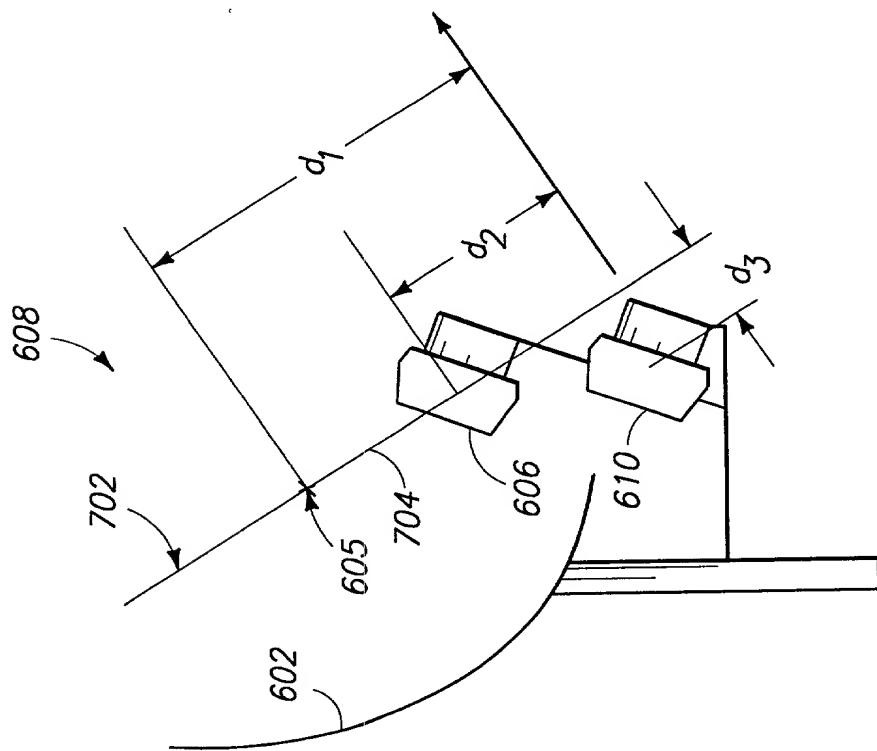


FIG. 7B

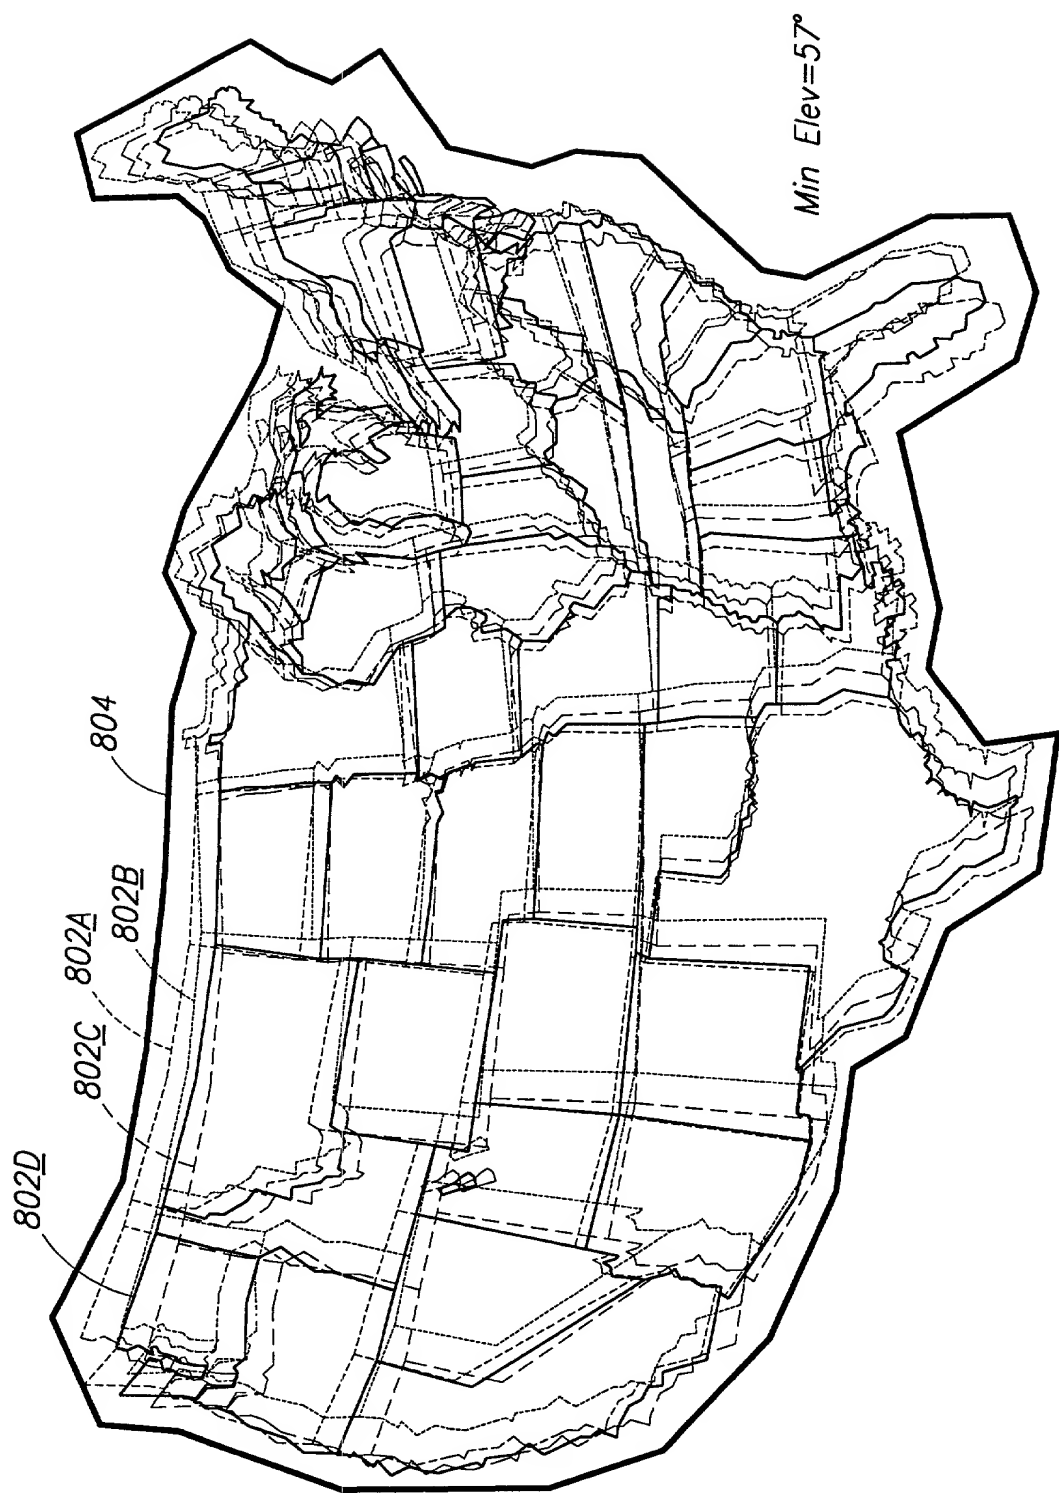


FIG. 8

